
ATLAS



In response to the requirements of the insurance industry, the Atlas jewelers safe was submitted to Underwriters Laboratories for approval. During extremely severe testing procedures, the safe demonstrated its ability to withstand virtually every tool and technique used by today's sophisticated burglars. Among the tools used were heavy duty torches, drills, jackhammers, and disc cutters. On January 8, 1986, the safe was awarded the TRTL-30X6 label.

In addition to the Underwriters Laboratories certification, Atlas has gone one step further by adding features not required by Underwriters Laboratories. Among them are extra relocking devices and fire protection.

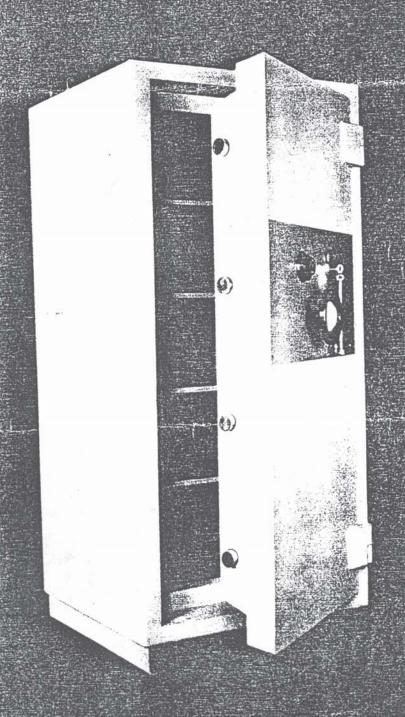

SIZE	EXTERNAL			INTERNAL			WEIGHT	CUBIC FEET CAPACITY
	HIGH	WIDE	DEEP	HIGH	WIDE	DEEP		
3520	503/8	31	331/2	353/8	20	20	2700#	8.2
4720	621/4	31	331/2	471/4	20	20	3300#	10.9
5920	74	31	331/2	59	20	20	4450#	13.6
7027	803/8	373/4	331/2	691/4	263/4	20	5500#	21.4
7036	803/8	473/8	385/8	691/4	36 ³ /8	251/4	6900#	36.8