

# **GC68 BANKERS QUALITY SAFES**



#### WALLS

All the walls of these safes have a total thickness of 153 mm (6") and are formed of a complex material called "Complexe GC", which adds Volcanite-two to the traditional and well-proven protection of Fichet-Bauche safes in an overlapping structure which increases the difficulties confronting the burglar.

#### DOOR


The door has a total thickness of 216 mm (8 1/2"), giving an actual protective thickness of 153 mm (6"), which is further reinforced in comparison with the walls, particularly in front of the locking and combination mechanisms.

It is mounted on external pivots, which enable it to be opened through 180°.


### LOCKING

The principal locking mechanism is an "NS" pump lock. This high security lock is operated by a short key. It is linked to our "Monocommande" combination lock, which offers a total of 63 million real and different possible combinations, thus ensuring that the secret of the lock is kept. These two mechanisms are protected by the whole of the door's defences.


The three largest models can also be fitted with a time lock with three chronometers, which allows the safe door to be immobilised for a period determined by the user; this may be as long as 160 hours.







the reserve

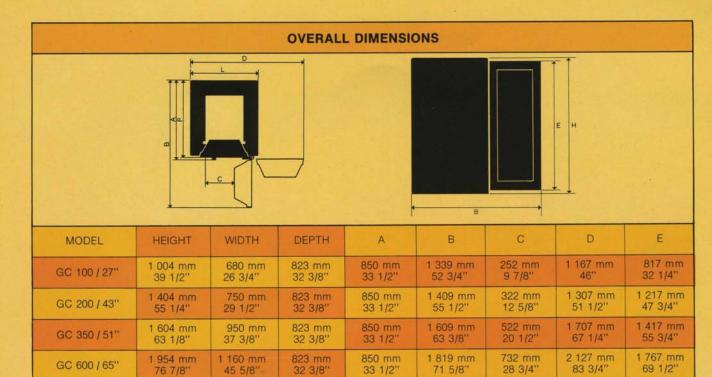

W-11-7	DIMENSIONS * add 1" (25 mm) for depth over handle.											
Money	EXTE	RNAL DIMENS	IONS	INTER	RNAL DIMENS	VOLUME	WEIGHT					
MODEL	HEIGHT	WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	VOLOME	WEIGHT				
GC 100 / 27"	1 004 mm	680 mm	850 mm	694 mm	374 mm	410 mm	110 ltr	1 200 kg				
	39 1/2"	26 3/4"	32 3/8"*	27 1/4"	14 3/4"	16 1/4"	3.9 cu-ft	23.7 cwt				
GC 200 / 43"	1 404 mm	750 mm	850 mm	1 094 mm	444 mm	410 mm	206 ltr	1 650 kg				
	55 1/4"	29 1/2"	32 3/8"*	43"	17 1/2"	16 1/4"	7.3 cu-ft	32.5 cwt				
GC 350 / 51"	1 604 mm	950 mm	850 mm	1 294 mm	644 mm	410 mm	355 ltr	2 250 kg				
	63 1/8"	37 3/8"	32 3/8"*	51"	25 1/4"	16 1/4"	12.5 cu-ft	44.2 cwt				
GC 600 / 65"	1 954 mm	1 160 mm	850 mm	1 654 mm	854 mm	410 mm	595 ltr	2 950 kg				
	76 7/8"	45 5/8"	32 3/8''*	65 1/8"	33 5/8"	16 1/4"	21 cu-ft	58 cwt				

		DIMENSIONS OF INTERNAL CUPBOARDS *								
	MODEL	OVERALL EXTERNAL DIMENSIONS			CLEAR INTERNAL DIMENSIONS				NUMBER	WEIGHT
		HEIGHT	WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH/ DOOR	DEPTH/ LOCK	LEAVES	I III
	GC 100 / 27"	224 mm 8 3/4"	368 mm 14 1/2"	395 mm 15 1/2"	184 mm 7 1/4"	322 mm 12 2/3"	376 mm 14 3/4"	340 mm 13 1/3"	1	11 kg 0.22 cwt
Г	GC 200 / 43"	224 mm 8 3/4"	438 mm 17 1/4"	395 mm 15 1/2"	184 mm 7 1/4"	392 mm 15 1/2"	376 mm 14 3/4"	340 mm 13 1/3"	1	12 kg 0.23 cwt
	GC 350 / 51"	224 mm 8 3/4"	638 mm 25"	395 mm 15 1/2"	184 mm 7 1/4"	592 mm 23 1/3"	376 mm 14 3/4"	340 mm 13 1/3"	1	16 kg 0.32 cwt
	GC 600 / 65"	224 mm 8 3/4"	848 mm 33 1/3"	395 mm 15 1/2"	184 mm 7 1/4"	794 mm 31 1/4"	376 mm 14 3/4"	340 mm 13 1/3"	2	22 kg 0.43 cwt

<sup>•</sup> The 4 models of the range can be fitted with an internal cupboard - Locking: "Monopole" keylock.



## FICHET-BAUCHE

For further information apply to: