
FICHET-BAUCHE

SAFES

BAR 11 - BAR 31

AT 2

AT 3)

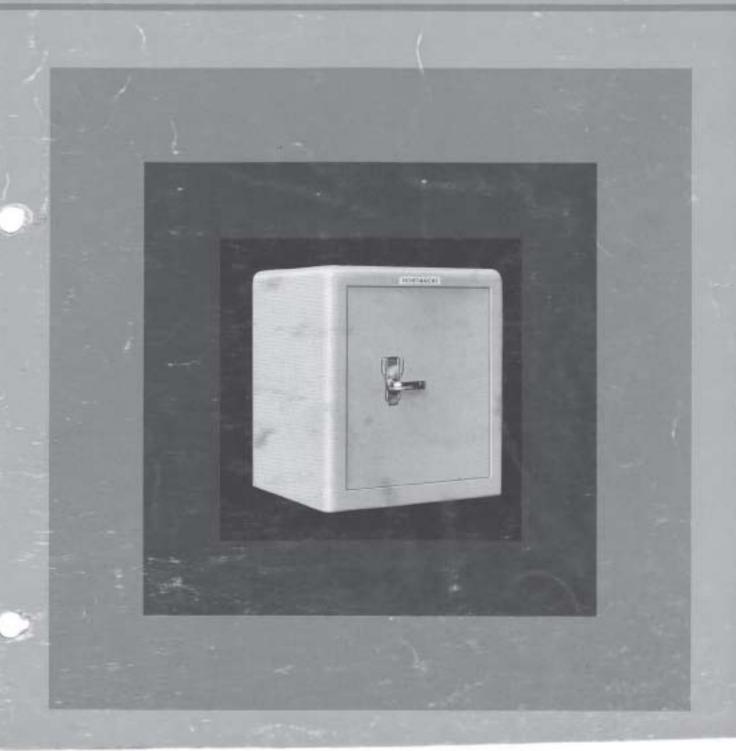






1000000	outside dimensions			inside dimensions				
	height	width	depth	height	width	depth	volume	weight
model	noigne	4010211	11.72	070	ADE	240		265 kg
BAR 11/AT2	520	570	445 17 1/2	370 14"1/2	425 1873/4	11/2	1.32 cu.ft.	5.1 cwt
	20 112			ADE	425	310		345 kg
BAR 31/AT3	645 25*1/2	570	550 21"3/4	495 19"1/2	16"3/4	12"1/4	2.35 cu ft.	5.8 cwt





The unique concealed double hinge allows the door to be opened to 180°, giving complete access to the full internal width of the safe.

Photograph showing how a BAR 31/AT3 safe has withstood an attack on the hinge side of the safe.

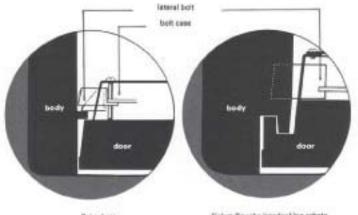

flat rebate | Ficher-Bauche interlocking retails | difference between flat rebate and interlocking rebate

The Fichet-Bauche interlocking rebate provides a high degree of resistance to wedging and explosive attacks around the edge of the door, and acts as a barrier to heat and flame in fire conditions.

LOCKING

The door is secured with FICHET-BAUCHE MONOPOLE keylock and 4 tube combination lock (see back page) as standard locking, ensuring a high degree of internal security if the key is compromised.

3 way moving bolts engaging into recessed cups in the body plus continuous dog bolt ensure continuity of strength between safe door and body. Relocking devices secure the boltwork independently in case of attack by explosives, mechanical tools or oxy acetylene cutting.

DOOR AND BODY

Thick inner and outer steel plates enclose an extra hard monolithic moulding resistant to oxy-acetylene together with drill resistant plates over all faces of safe, body and door.


Both safes are prepared with base fixing holes and are supplied with adjustable shelves.

HOW THEY RESIST

BAR II / AT 2 Safes which have withstood recent attacks.





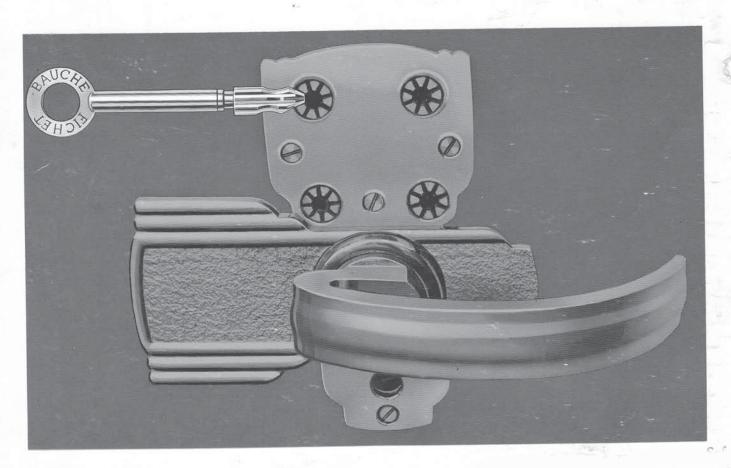



FICHET-BAUCHE

Head office 15-17, avenue Morane-Saulnier 78140 Vélizy-Villacoublay Tél. 946.96.44 Télex 697 389 F

Subsidiaries and after-sales service throughout Europe.

OUR AIM IS TO CONSTANTLY IMPROVE OUR PRODUCTS. WE THEREFORE RESERVE THE RIGHT TO ALTER THE SPECIFICATION WITHOUT PRIOR NOTICE.