


## 4 AND 6 HOUR DOORS

**LABELS:** Underwriters' Laboratories fire resistive rating label and Relocking Device label.

**INSURANCE:** Class "B" Mercantile Burglary Insurance.

**WALL OPENING:** See details at right.

**ADJUSTABLE WALL FRAME:** The adjustable wall frame eliminates the problem of making the wall to fit the door frame. This feature can save many dollars in installation costs. (See "e" dimensions in schedule.)

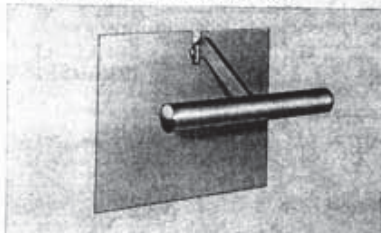

**PANIC BAR ESCAPE MECHANISM:** The Panic Bar Escape Mechanism is designed to prevent forced or accidental lock-in. No handles to turn. No knobs to twist. Just push on the panic bar to open the door.

**FINISH:** Textured Gray. Bolt handle and dial of modern design in chrome.

**RECOMMENDED USE:** 4-HOUR DOORS should be specified for vaults in buildings that are rated up to 4 hour fire risks. 6-HOUR DOORS should be specified for vaults in buildings that are rated up to 6 hour fire risks.


### ARCHITECTS' SUGGESTED SPECIFICATIONS

"The contractor shall furnish and/or install H-H-M Model 3260 (6-Hour) or 3240 or 4040 (4-Hour) (right or left swing), flat sill, Fire-insulated Vault Door(s) bearing the (6 hour or 4 hour) labels of the Underwriters' Laboratories, Inc., and the Underwriters' Laboratories, Inc., listed Relocking Device label for relocking device designed to deadlock the door when the lock is under mechanical, explosive, or torch attack. The door shall have a clear opening of 78" high by 32" wide for models 3260 and 3240; and 78" high by 40" wide for model 4040. The entrance of the door is flush with the finished floor level. Door and frame shall be filled with MONOLITE, a fire resistive insulation. The doors shall be 5" thick on edge and locked by 10, 3/4" diameter bolts checked by 3 tumbler, key changing combination locks. The door shall be provided with a panic release bar for emergency escape. Doors are equipped with 3 offset roller bearing hinges. The door shall be erected according to the manufacturers' installation instructions." Finish is Textured Gray.

# H-H-M INSULATED VAULT DOORS

• SCHEDULE •

MODEL	CLASS	"a"	"b"	"c"	"d"	"e"	APPROX. SHPC. WT.
3240	4 HR.	46 3/8"	32"	44"	39 1/8"	10" TO 11 1/2"	900
4040	4 HR.	54 3/8"	40"	52"	47 1/8"	10" TO 11 1/2"	1020
3260	6 HR.	46 3/8"	32"	44"	39 1/8"	10" TO 11 1/2"	1120

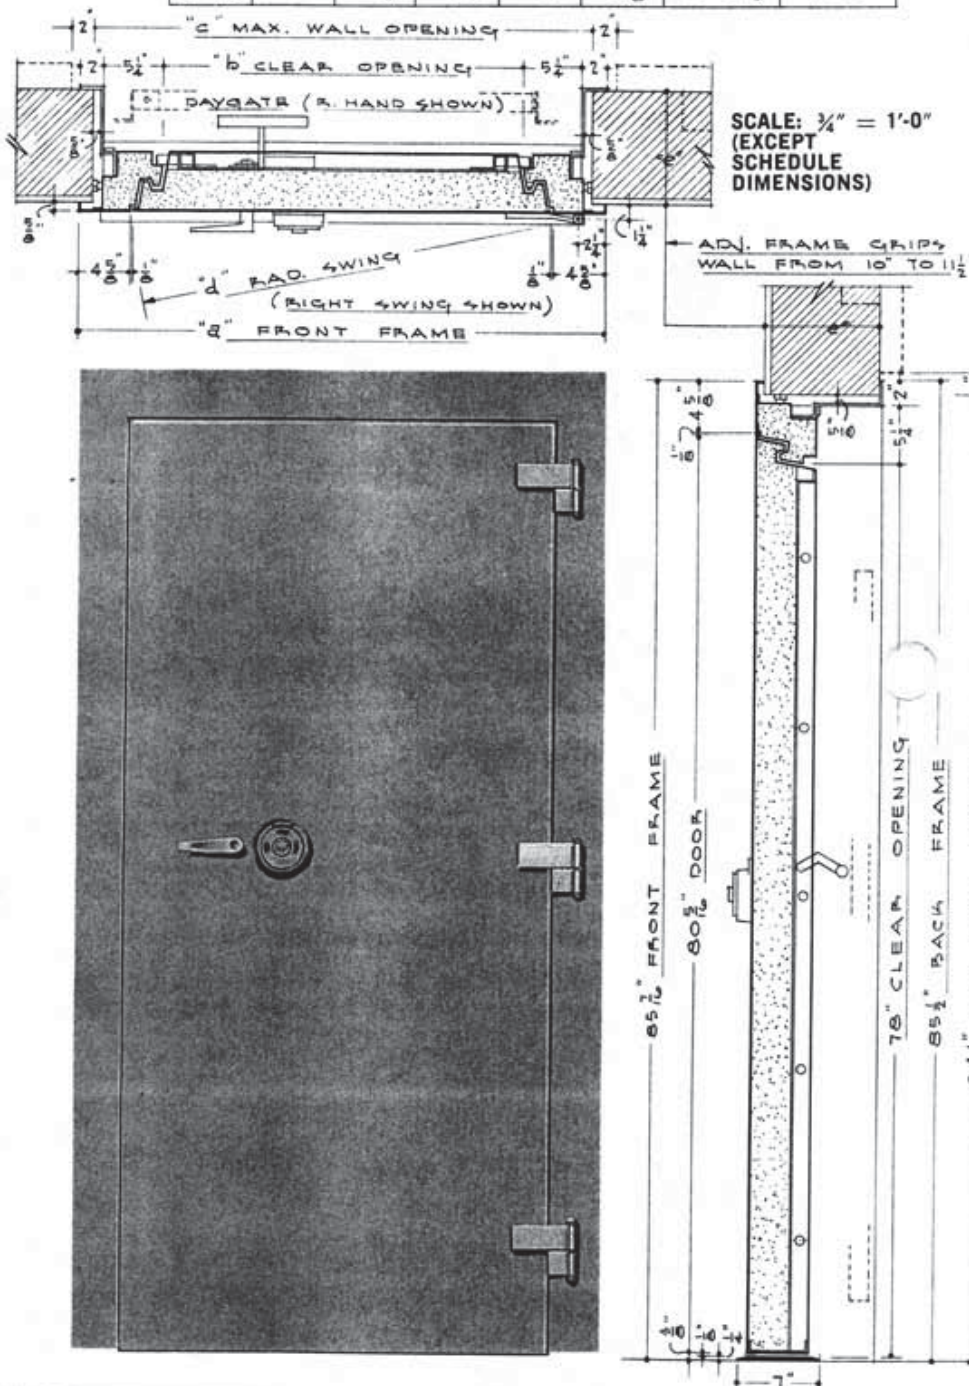

SCALE: 3/4" = 1'-0"  
(EXCEPT  
SCHEDULE  
DIMENSIONS)



**HERRING - HALL - MARVIN VAULT DOORS**

ALL OVER THE WORLD IT'S A SAFE NAME