



## ISM Treasury Mk3

### U.L. TRTL—30X6

The ISM Treasury Mk3 safe is the result of ISM's striving to develop advanced products that anticipate new security needs. The Mk3 is ISM's second generation TRTL—30X6 safe designed for low-weight limited locations using sophisticated composite barrier materials.



#### Door

The overall thickness of the door is 190mm (7.5"). It is constructed of outer and inner 10 mm (0.4") thick steel plates continuously welded together, enclosing a 70mm (2.75") thick casting of Alchronite ISM's patented superior torch and drill resistant material. Additional protection is provided by a frame of copper bars in the door jamb area.

#### Body

The body features a unique one piece bell casting of Alchronite of a 55 mm (2.2") thickness going up to a maximum thickness of 125 mm (5") at the boltwork protective area. In addition the body is constructed with a dense layer of Insutex, ISM's superior insulation material to protect the safe's contents against severe fires.

#### Locks

The treasury Mk3 is equipped with a U.L. listed group 1 Manipulation Proof combination lock. A second nine lever double-bit key lock is provided in conjunction with the combination lock. As an optional extra all models (except the 2618 & 3722) accept a time lock.

#### Boltwork

The boltwork and locking mechanism were designed to give maximum protection against explosive attacks from all directions. The safe has a three way moving boltwork with fixed bolts on the hinge side of the door.

#### Relocking Devices

The locks and vital mechanism areas are protected by a special glass plate which if tampered with releases a number of randomly located relockers independent of the locks. This provides the safe with a maximum security deterrent.


#### Interior Fittings

Adjustable/removable shelves are available for setting up the safe interior to accept trays for jewelry, cash, and other valuables. Each ISM Treasury Mk3 has an inner vault activated by a key lock.




# ISM Treasury Mk3


## Dimensions and Weights




TR2618



TR3722




TR4722



TR5722



TR6529



TR7238


Model	Inside Dimensions (mm/in)			Outside Dimensions (mm/in)			Volume (Lt /Cu Ft )	Est. Weight*** (Kg/Lbs)
	Height	Width	Depth	Height	Width	Depth*		
TR2618	675 26.6	470 18.5	410 16.1	885 34.8	685 27.0	705 27.8	130 4.59	880 1935
TR3722	955 37.6	570 22.4	510 20.1	1160 45.7	785 30.9	805 31.7	278 9.80	1320 2900
TR4722	1210 47.6	570 22.4	510 20.1	1415 55.7	785 30.9	805 31.7	352 12.40	1570 3450
TR5722	1465 57.6	570 22.4	510 20.1	1670 65.7	785 30.9	805 31.7	426 15.01	1800 3960
TR6529	1665 65.6	745 29.3	510 20.1	1870 73.6	960 37.8	805 31.7	633 22.36	2290 5040
TR7238	1850 72.8	990 39.0	660 26.0	2060 81.1	1196** 47.1	955** 37.6	1209 42.72	3090 6800

\* Add 65 mm. to outside depth for handle.

\*\* (7238) Add 76 mm to outside depth for hinges And 22 mm to outside width for hinges.

\*\*\* (2618, 3722, 4722, 5722, 7238) Door weights 25% of total weight.  
(6529) Door weights 30% of total weight

## Door Swing Projections

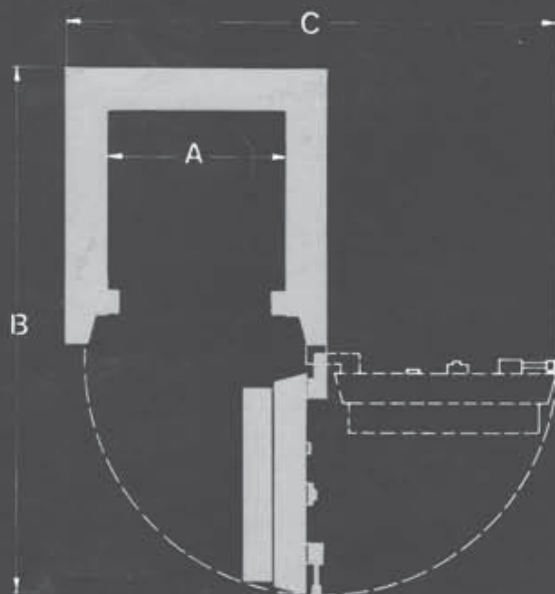

# ISM

## Door Swing Dimensions

Model	A	B	C
TR2618	470 18.5	1340 52.8	1270 50.0
TR3722	570 22.4	1540 60.6	1470 57.9
TR4722	570 22.4	1540 60.6	1470 57.9
TR5722	570 22.4	1540 60.6	1470 57.9
TR6529	745 29.3	1715 67.5	1820 71.7
TR7238	990 39.0	2130 83.9	2335 91.9

In line with our policy to provide the best in security, ISM reserves the right to incorporate any improvements and alter any specifications without prior notice.

