
ISM ULTRAVULT

THE SAFE THAT'S SIX TIMES SAFER!



THE FIRST UL® CERTIFIED TL-30x6

ULTRA VAULT TL-30x6

THE SAFE THAT'S SIX TIMES SAFER!

SPECIAL FEATURES

- The first safe to receive Underwriters Laboratories (UL*) new label TL-30x6—tool-resistant on all six sides
- Extra-strength, six-sided protection against concentrated attacks with mechanical and electrical tools—and even oxy-acetylene torches; fire protection for at least one hour
- Construction quality of more costly units at an affordable price
- Door made with Alchronite, ISM's patented drill- and torch-resistant alloy that's standard on all our high-security safes
- New dimensions that allow models to fit through narrow doorways and into tight spaces

DOOR

- Full 6" thick
- Constructed of outer and inner steel plates electrically welded together and enclosing a thick casting of Alchronite

BODY

- Completely tailored one-piece casting of ISM's advanced, 3"-thick CS-650 monolithic anti-penetration composite material
- Reinforcement of the high-density CS-650 with an anti-penetration alloy grid, steel profiles and ½" alloy plate
- Reinforcement of boltwork area with special alloy insulations
- Encasement of CS-650 monolith in electrically welded steel plates, making up total body thickness of 3-½"

LOCKS


- Two locks: a UL group 1 manipulation-proof combination lock and a maximum-security key lock
- Locking mechanism includes special material which protects against sophisticated drilling from all directions

BOLTWORK AND LOCKING MECHANISMS

- Three-way active boltwork, plus double-action locking mechanism
- Bolt detention system that further secures entire boltwork mechanism, protecting bolts when door is open
- Glass plate protection on all locks and in all vital mechanism areas, so that, when door is attacked, glass will shatter, activating a double relocking mechanism and cross-locking the bolts

INTERIOR FITTINGS

- Adjustable, removable shelves
- Up to 50% more storage capacity than previous models

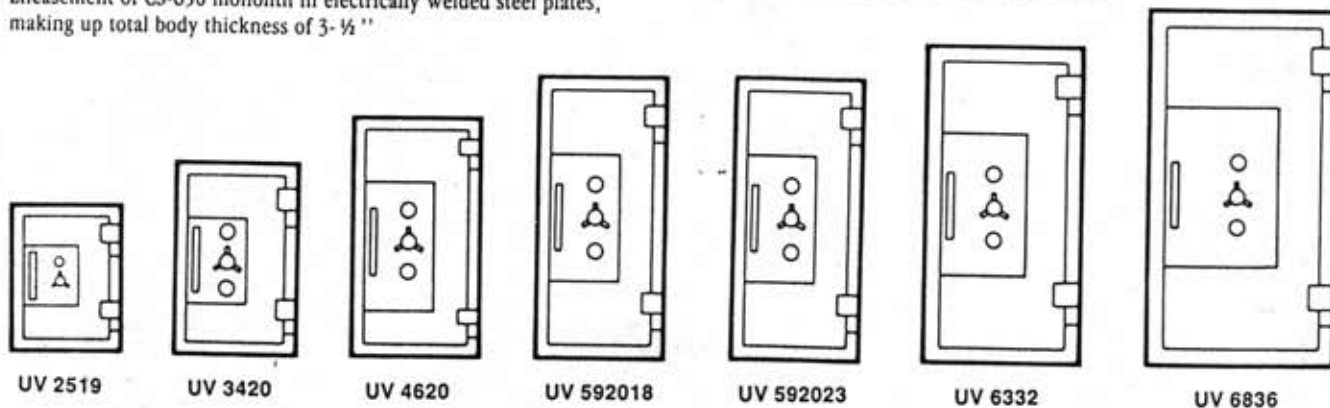

MODEL	INSIDE DIMENSIONS			OUTSIDE DIMENSIONS			JEWELRY TRAY CAPACITY	VOLUME (CU. FT.)	EST. WEIGHT (LBS.)
	HEIGHT	WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH*			
UV 2519	25	19	16	32	26	25.5	48	4.5	1630
UV 3420	34	20	18	41	27	27.5	66	7.1	2098
UV 4620	46	20	18	53	27	27.5	90	9.6	2530
UV 592018	59	20	18	66	27	27.5	116	12.3	2900
UV 592023	59	20	23.25	66	27	33.0	174	16.0	3590
UV 6332	63	32	18	70	39	27.5	248	21.0	4050
UV 6836	68	36	20	75	43	35.5	396	36.8	4840

*Add 2½" to outside depth for handle

**Add 3" to outside depth for hinges and 1" to outside width for hinges for model 6836 only

***Capacity based on standard jewelry trays measuring 1"x8¼"x14¼"

ISM reserves the right to alter specifications without notice.

ISM S.P.C.
A Volta
Group
Company

We don't just meet the standards,
we create them.