



KNIGHT UNDERWRITERS TL-15 CLASS "ER"

MERCANTILE & BROADFORM BANK RATING "BR"

Knight TL15 Safes offer the highest state of the art in American made money safes. These square door safes qualify for Mercantile and Broadform Insurance Class "ER" with a Bank Rating of "BR." In addition to the standard features a wide range of options, such as time locks, special interiors, 3-way bolt system, etc. are available. See reverse side for standard sizes.

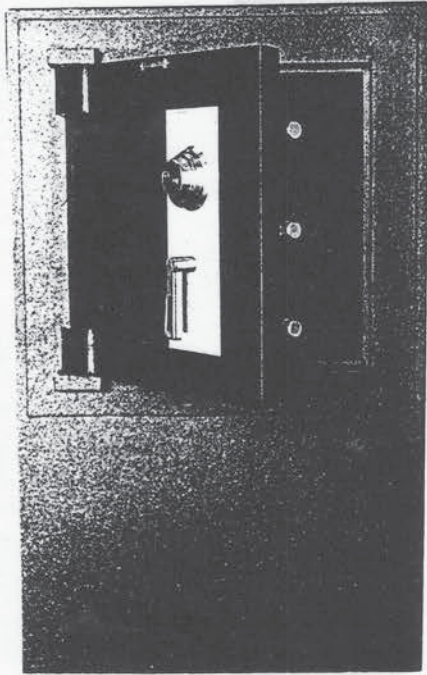

2020 Incladding

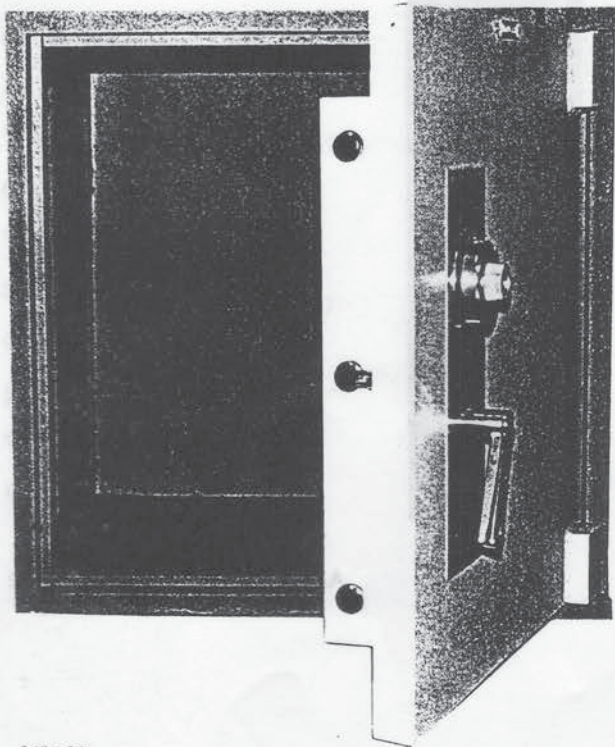

2424-20

Construction Characteristics

- 1 inch body and 1½ inch doors of carbon steel with 50,000 lbs. tensile strength. All joints electrically welded.
- Group II Underwriters approved lock and separate relocking device.
- Spyproof key locking dial for dual custody.
- Bolt detent to eliminate damage to locking bolts.
- The country's finest drill resistant hard plate protecting the lock and EACH locking bolt.
- All doors removeable and adjustable when open.
- Three or more one inch chrome locking bolts.
- Continuous locking bar on hinge side.
- Extra heavy hinges with ball bearings and a single pivot point.
- Hard plate protecting lock is Xray proof, radiographic proof, drill resistant and punch resistant.
- 24" high and larger available with 3-way bolt system.
- Bottom of all safes treated with Zinc Chromate to prevent rust.
- All safes painted with Polane® Polyurethane Enamel to give them superior appearance and durability.
- Wide range of optional interiors, timelocks, time delays, and claddings available.
- All safes carry full one year warranty.

BUY AMERICAN

STANDARD SIZES — Custom sizes on request

Model	Inside			Outside			Clear Drain Opening H W	Capacity Cubic In.	Weight Lbs.
	H	W	D	H	W	D*			
1212	12	12	12	14	14	17	11 11	1,728	381
1616	16	16	16	18	18	21	15 15	4,096	638
2020	20	20	20	22	22	25	19 19	8,000	919
2420	24	20	20	26	22	25	23 19	9,600	1,015
2424	24	24	20	26	26	25	25 25	11,520	1,143
2424D	24	24	24	26	26	29	28 28	13,824	1,258
3020	30	20	20	32	22	25	29 19	12,000	1,239
3024	30	24	20	32	26	25	29 23	14,400	1,329
3028	30	28	20	32	30	25	29 27	16,800	1,468
3030	30	30	20	32	32	25	29 29	18,000	1,551
3030D	30	30	24	32	32	29	29 29	21,600	1,685
3434	34	34	26	36	36	31	33 33	30,056	2,072
3624	36	24	20	38	26	25	35 23	17,280	1,535
3636	36	36	20	38	38	25	35 35	25,920	1,992
4024	40	24	20	42	26	25	39 23	19,200	1,657
4034	40	34	26	42	36	31	39 31	35,360	2,358
4524	45	24	20	47	26	25	44 23	21,600	1,798
5024	50	24	20	52	26	25	49 23	24,000	1,967
5030	50	30	20	52	32	25	49 29	30,000	2,250
5034	50	34	26	52	36	31	49 31	44,200	2,747
6030	60	30	20	62	32	25	59 29	36,000	2,604
6034	60	34	26	62	36	31	59 31	53,040	3,159
6634	66	34	26	68	36	31	65 31	58,344	3,452
7234	72	34	26	74	36	31	71 31	63,648	3,677
8234	82	34	26	84	36	31	81 31	72,488	4,109

Add 2" to depth for handle