


MOSLER

BURGLARY-RESISTIVE CHESTS

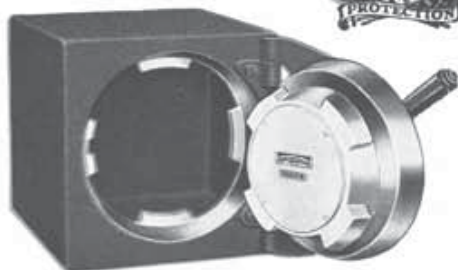

DOORS: Minimum thickness, 1½", machined from single piece of solid steel plate, providing lugs of unusual strength which interlock behind similar lugs on chest body, accomplishing the most secure locking method possible for this type equipment. Solid steel doors are case-hardened, providing an exceptionally hard surface to resist drills, and a soft, tough core to resist explosives. **LOCK:** Mosler three-tumbler, bronze-case combination lock, capable of 1,000,000 changes, and equipped with Underwriters' Laboratories approved relocking device for added protection against mechanical and explosive attack. Drill-resisting pins to protect locking bolt. Dial of combination lock can only be turned, locking door, when door is in closed position and lugs in engagement.

TYPE X-60 CHESTS

Doors, 1½" thick, solid steel, case-hardened. Bodies, 1½" thick, solid steel, case hardened. Underwriters' Laboratories relocking device model "F" mercantile burglary insurance rate. Chests Nos. 00XV to 2X inclusive must be anchored in a safe or concrete block to produce combined weight of 750 pounds.

TYPE H CHESTS

Doors, 1½" thick, solid steel, case-hardened. Bodies, 1" thick, solid cast steel, case-hardened. Underwriters' Laboratories relocking device label "E" mercantile burglary insurance rate, subject to 10 per cent discount for relocking device.

TYPE E CHESTS

Doors and bodies same as Type H Chests, except bodies are of welded construction. Mercantile insurance rate same as for Type H Chests. **FINISH:** Mosler standard wrinkle green.

A Timelock, as shown on supplementary sheet, can be attached to Chests where depth and size of door permit.

These Chests are not included in Procurement Division Schedule of Safes. For prices and other information, communicate with The Mosler Safe Co., Hamilton, Ohio, or nearest branch.



No. 4160A Safe. Item No. S-26-1309 with chest installed.

Form FP 922—M-12-40.

TYPE X-60



Catalogue No.	Outside Dimensions			Inside Dimensions			Clear Door Open'g	Appr. Net Wt. Lbs.
	High	Wide	Deep Overall	High	Wide	Deep Clear		
*00XV	12½" diam.		25½"	10" diam.		16½"	6½"	425
*00X	11"	11"	18½"	8"	8"	10½"	6½"	350
*0X	12"	12"	16½"	9"	9"	7½"	7½"	340
*1X	14"	14½"	15½"	11"	11½"	6½"	9"	430
*2X	14"	14½"	19½"	11"	11½"	11"	9"	545
3AX	20"	20"	18½"	17"	17"	8½"	12"	800
3X	20"	20"	19½"	17"	17"	9½"	12"	850
5X	20"	24"	28½"	17"	21"	18½"	12"	1370
6X	24"	24"	28½"	21"	21"	18½"	18"	1520
7X	30"	30"	28½"	27"	27"	18½"	18"	2130

*Nos. 00XV, 00X, 0X, 1X and 2X bear the Underwriters' Laboratories label, only when secured in a safe or anchored in a concrete block, as the combined weight is 750 lbs. or more.

TYPE H



Catalogue No.	Outside Dimensions			Inside Dimensions			Clear Door Open'g	Appr. Net Wt. Lbs.
	High	Wide	Deep Overall	High	Wide	Deep Clear		
00HS	10"	10"	13½"	8"	8"	5½"	6½"	170
00H	10"	10"	18½"	8"	8"	10½"	6½"	235
0H	12"	12"	16½"	10"	10"	9"	7½"	285
2AH	14"	14½"	17½"	12"	12½"	9½"	9"	410
2H	14"	14½"	19½"	12"	12½"	12½"	9"	450
3H	20"	20"	19½"	18"	18"	11½"	12"	730
5H	20"	24"	28½"	18"	22"	20"	12"	1140
6H	24"	24"	28½"	22"	22"	20"	18"	1260
7H	30"	30"	28½"	28"	28"	20"	18"	2600
8H	36"	36"	29½"	34"	34"	19½"	30"	450
*TH-0	16"	12"	19½"	*See note below			7½"	450
1425H	14½"	25½"	20½"	12½"	23½"	11½"	9½"	630
1431H	14½"	31½"	20½"	12½"	29½"	11½"	9½"	730

*Chest standard with partition and inside door.
‡Depth behind front wall 13½".

TYPE E



Catalogue No.	Outside Dimensions			Inside Dimensions			Clear Door Open'g	Appr. Net Wt. Lbs.
	High	Wide	Deep Overall	High	Wide	Deep Clear		
00ES	10"	10"	13½"	8"	8"	5½"	6½"	170
*00EV	11½" diam.		23½"	*See note below			6½"	260
00E	10"	10"	18½"	8"	8"	10½"	6½"	235
0E	12"	12"	16½"	10"	10"	9"	7½"	285
2AE	14"	14½"	17½"	12"	12½"	9½"	9"	410
2E	14"	14½"	19½"	12"	12½"	12½"	9"	450
3AE	20"	20"	18½"	18"	18"	10½"	12"	700
3E	20"	20"	19½"	18"	18"	11½"	12"	730
5E	20"	24"	28½"	18"	22"	20"	12"	1140
6E	24"	24"	28½"	22"	22"	20"	18"	1260
7AE	30"	30"	24½"	28"	28"	15½"	18"	1600
7E	30"	30"	28½"	28"	28"	20"	18"	1760
8E	36"	36"	29½"	34"	34"	19½"	30"	2500

*Chest standard with partition and inside door.

THE MOSLER SAFE CO.

320 FIFTH AVE.,
NEW YORK CITY

WASHINGTON, D. C.
Chandler Bldg., 1427 Eye St., N. W.
Telephone: REpublic 2560

FACTORIES:
HAMILTON, OHIO

BOSTON
84 Sudbury St.

CHICAGO
214 W. Jackson Blvd.

PITTSBURGH
395 Union Trust Bldg.

Cincinnati, Cleveland, Covington, Ky., Detroit, Dallas, Kansas City, Los Angeles, Portland, Ore., and Other Principal Cities in the United States

COLOMBIA, S. A.—HAVANA—HAWAII—MANILA—PANAMA—PUERTO RICO—SHANGHAI—TOKYO—VENEZUELA, S. A.

MOSLER HAS MEANT SAFES AND SAFETY FOR MORE THAN 75 YEARS

Copyright, 1940. The Mosler Safe Co.

Printed in U. S.