


MOSLER INSULATED CHEST

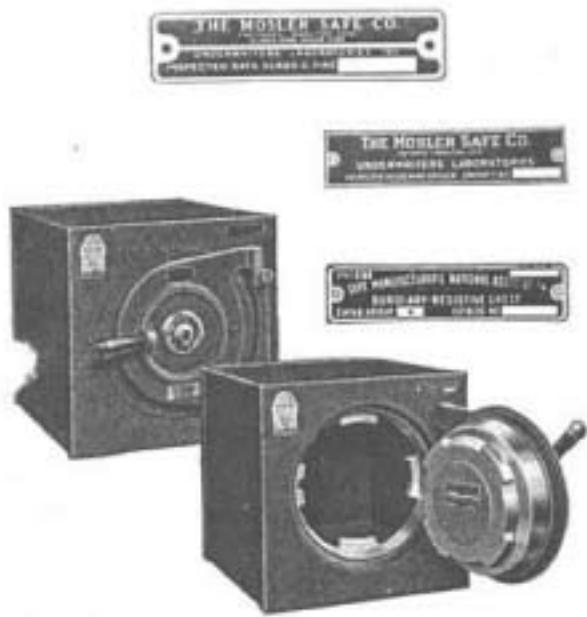

Cat. No.	Inside Dimensions inches			Outside Dimensions inches			Door Open- ing Dia. In.	Appt. Net Wt. Lbs.		
	Body			Overall High						
	High	Wide	Clear Deep							
2E-1	12"	12 1/2"	12 1/2"	16 1/2"	17 1/2"	18 1/2"	9"	400		

THE ONLY Burglary-Resistant Chest made that bears the Underwriters' Laboratories, Inc., label for one-hour fire exposure, including 30-foot drop or impact test and explosion test with similar label awarded by the Safe Manufacturers' National Association, in addition to the Underwriters' relocking device label. Also qualified for "double-burglar proof classification."

Chest takes "E" mercantile burglary insurance classification with 10% discount in insurance rates for relocking device label. See safe, page 10.

This safe uses approximately 70% in mercantile burglary insurance rates.

Formerly, both the safe and the chest were necessary to obtain the dual protection against both fire and burglary now offered by this chest.

Finished in Mosler smooth gray. Special colors and finishes slightly higher.

THE FIRE FORTRESS



No. 1418-2E

SAFE DIMENSIONS

Inside Dimensions			Outside Dimensions			Appt. Net Wt. Lbs.
High	Wide	Deep	High	Wide	Deep	
18 1/2"	14 1/2"	20 1/2"	30 1/2"	19 1/2"	27 1/2"	740

Space above chest, 4 1/2".

2E CHEST DIMENSIONS

12"	12 1/2"	13 1/2"	14"	14 1/2"	15 1/2"	450
10"	10"	9"	12"	12"	13"	285

OE CHEST DIMENSIONS

10"	10"	9"	12"	12"	13"	285
10"	10"	9"	12"	12"	13"	285

No. 1418-OE

Safe is the same as above. The space above chest is 6 1/2". The space to the right of the chest is 2 1/2" wide x 10" high x 20 1/2" deep. Shelf across the safe on top of the chest. Approximate net weight 600 lbs.

A moderate design safe, which has been tested and approved by Underwriters' Laboratories, Inc., for one-hour fire exposure, including the 30-foot drop or impact test and the explosion test. A one-hour fire exposure label also has been awarded by the Safe Manufacturers' National Association. The chest bears the Underwriters' Laboratories, Inc., relocking device label and the Safe Manufacturers' National Association group four label.

Safe has four composition swivel wheels mounted beneath 2" high steel base, as illustrated, to protect the floor over which the safe may be moved.

Finished in Mosler smooth gray. Special colors or finishes slightly higher.