


MODULAR INTERIORS

Numerous combinations of open compartments and lockers can be built using the modules described below. Depending on the internal width of the safe, one or two modules may be installed side-by-side. Inside each module there are pre-punched holes to allow placing shelves in any of 5 evenly spaced locations.

Open compartments can be upgraded to lockers through use of three sizes of locker doors. Lock options on the doors include: single or dual key locks, Mosler CD-302 combination locks, and Mosler Defender timelocks with 7- or 15-minute delay. All locker doors are ½ inch thick formed metal.

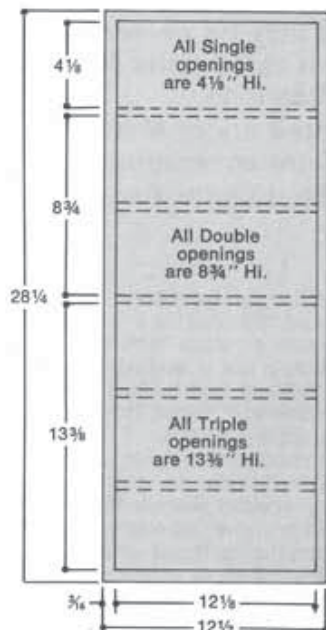

BASIC MODULE

ARRANGEMENT "A"


- IM281218 Module
- MS1218 Shelves (2)
- KLD-0411S Single Height Locker Door with Single Keylock
- D-KLD-0811S Double Height Locker Door with Deposit slot and single keylock
- CLD-1311 Triple Height Locker Door with CD-302 Lock

ARRANGEMENT "B"

- IM281218 Module
- MS1218 Shelves (4)
- CLD-0411 Single Height Locker Door with CD-302 Lock
- TLD-0811-2 Double Height Locker Door with Defender Combination Timelock



ARRANGEMENT A

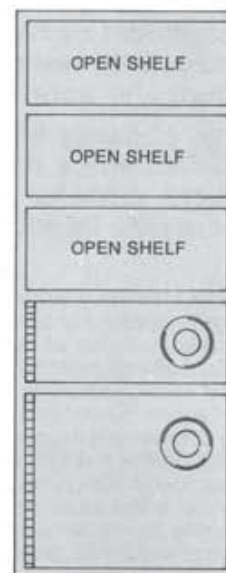

ARRANGEMENT B

TYPICAL MODULE ARRANGEMENTS

(Locker Doors can swing left or right as specified.)
(Doors with Deposit Slots, right swing only.)

CATALOG NUMBERS and DIMENSIONAL INFORMATION FOR TL-15 MONEY SAFES

CATALOG NO.	PRODUCT CODE		DIMENSIONS			CLEAR DOOR OPENING		CAPACITY CU. IN.	EST. SHIP. WT.
			HIGH	WIDE	DEEP*	HIGH	WIDE		
ER201612 In CB	368800 368801	O/D	23 3/4	19 1/4	17 1/4	21 3/4	16 3/4	4,940	870
		I/D	21 1/4	18	12 1/2	21 1/4	16 3/4	4,940	1700
ER201623 In CB	368810 368811	O/D	23 3/4	19 1/4	28 1/4	21 3/4	16 3/4	9,270	1090
		I/D	21 1/4	18	23 3/4	21 1/4	16 3/4	9,270	2340
ER282420 In CB	368820 368821	O/D	31 1/4	27 1/4	25 1/4	29 3/4	24 1/2	15,870	1620
		I/D	29 3/4	25 1/4	20 1/2	29 3/4	24 1/2	15,870	3200
ER422420 In CB	368880 368881	O/D	45 3/4	27 1/4	25 1/4	43 3/4	24 1/2	23,325	2050
		I/D	43 3/4	25 1/4	20 1/2	43 3/4	24 1/2	23,325	3980
ER353520 In CB	368830 368831	O/D	38 3/4	38 3/4	25 1/4	36 1/2	35 3/4	27,945	2400
		I/D	36 1/2	37	20 1/2	36 1/2	35 3/4	27,945	4400
ER353527 In CB	368840 368841	O/D	38 3/4	38 3/4	32 1/4	36 1/2	35 3/4	37,435	2710
		I/D	36 1/2	37	27 1/2	36 1/2	35 3/4	37,435	5200
ER572420 In CB	368850 368851	O/D	60 1/4	27 1/4	25 1/4	58 1/4	24 1/2	31,045	2700
		I/D	58 1/4	25 1/4	20 1/2	58 1/4	24 1/2	31,045	4580

*For handle and hinge ear projection add 1 1/2" to body depth.
CB = Concrete Block