



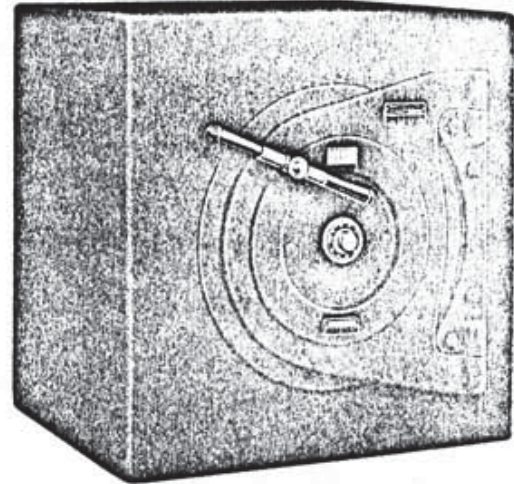

MOSLER BURGLARY-RESISTIVE CHESTS TYPE "X-60"

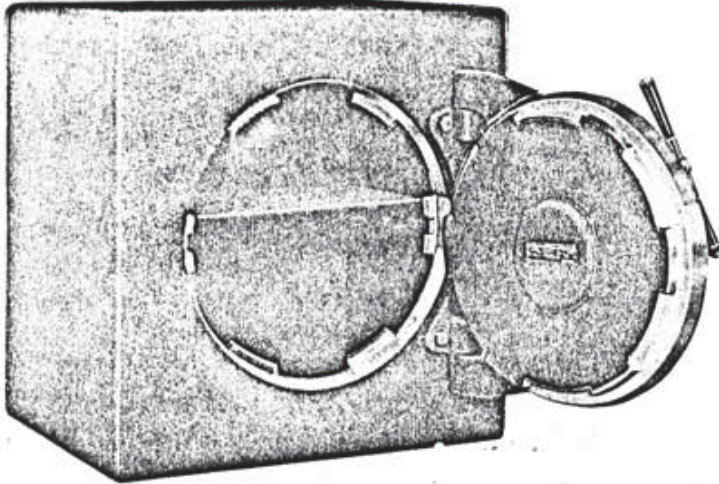

| Catalog Number | Code Word | Approx. Shipping Weight Lbs. | OUTSIDE DIMENSIONS, Inches | | | | INSIDE DIMENSIONS, Inches | | | Door Opening Diameter | Catalog Number |
|----------------|-----------|------------------------------|----------------------------|------|------|------------------|---------------------------|------|------------------|-----------------------|----------------|
| | | | BODY | | | Overall | High | Wide | Clear Deep | | |
| | | | High | Wide | Deep | | | | | | |
| 6X | HAFSE | 1595 | 24 | 24 | 24 | 28 $\frac{3}{8}$ | 21 | 21 | 18 $\frac{3}{8}$ | 18 | 6X |
| 7X | HANIC | 2210 | 30 | 30 | 24 | 28 $\frac{3}{8}$ | 27 | 27 | 18 $\frac{3}{8}$ | 18 | 7X |

Above chests have Bakelite geared handles.

Guide No. 381 A16. December 31, 1931—Laboratories' File BP319.

Mosler Safe Co., The, Mfr.,
Hamilton, Ohio.

Burglary-resisting Chest, Class X-60.


Round-door, lug type hardened steel chests of the burglary-resistive type equipped with combination lock and relocking device; made in various sizes, the small sizes being anchored in concrete blocks or larger safes. Chests bearing Class X-60 Burglary labels are capable of affording protection for at least one hour against expert burglarious attack by commonly employed burglary tools (excepting oxy-fuel gas torch), high explosives, and any combination of these means within practical limits.

STANDARD—Burglary—Class X-60.

LABEL SERVICE.

See description of Label Service on guide card, also General Information Card filed back of guide card.

This card is issued by Underwriters' Laboratories.

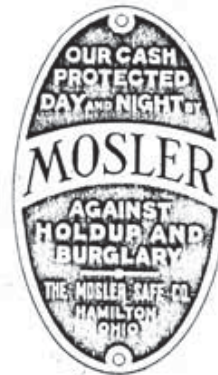

This "Bandit-Detour" Sign furnished for display on your store or office door when chest has inner holdup compartment.

MOSLER TYPE "X-60" CHESTS have passed the severe burglarious tests of the Underwriters' Laboratories necessary to qualify for the "X-60" label. These tests prove that the Type "X" Chests are resistant to at least one-hour expert burglarious attack by high explosives, drills and mechanical tools commonly employed by burglars. (See Underwriters' Laboratories notice to Insurance Companies, reproduced above).

To qualify for the "X-60" label, the Underwriters' Laboratories require minimum weight of 750 pounds to retard removal of Chest from premises by burglars. This weight requirement can be met by installing smaller Chests in fire-resistive safe or concrete block. This installation can be accomplished in the field if supervised by a factory representative, and reported to the Underwriters' Laboratories.

Any chest can be installed in a metal covered, reinforced concrete block, or a fire-resistive safe.



Additional "Notice to Bandits" which is attached to chests having inner holdup compartments.