



**Steelage**  
WORLD CLASS SECURITY

**FIRE & BURGLAR RESISTANT SAFES**  
**UL CLASS TL-30**

# Steelage **BURGLARY & FIRE RESISTANT TL - 30 SAFES**

**SPECIAL FEATURES :** The Fire and Burglar resistant TL-30 Safes have some special



unique features.

- The safe has in addition to the UL approved combination lock, an additional Dual Control Key Lock.
- All safes have a lockable drawer unit.
- The safes

are available in different sizes to suit varied needs.

- The Steelage Double Door Safes also carry the UL-TL30 rating.
- Bigger models from 1050-TL30 onwards are composite safes with four-way shooting bolts.
- Adequate protection against burglar attacks and fire is built into each safe.
- The doors of the TL-30 safes are removable.
- Glass plate is available as an optional extra.

**STRINGENT TESTS :** The strength and endurance of the Steelage TL-30 Safes

were severely tested by skilled UL technicians. Heavy duty drills, Abrasive wheels, chisels and other common burglar tools were utilised for this test. The Steelage TL-30 Safes passed all the necessary tests and the Underwriters Laboratories granted them the TL-30 rating. Steelage TL-30 Safes have also passed a fire and fall impact test at the Central Building Research Institute, Roorkee - India's premier testing institute for fire resistant products. Paper records were found in good condition after the safe was subjected to fire test. The safe was removed and then dropped from a height of 4 metres before opening for inspection. There was no visible damage after the drop test.





## CONSTRUCTION

**BODY :** The entire body of the Safe is of uniform strength and constructed from tough steel plates using the most up to date steel bending techniques. It has a 20-bend construction, with rounded corners and reinforced bent flanges. The formed shell together with the back plate is electrically welded to form a one-piece body. The inner lining is made of heavier steel plates suitably reinforced and anchored to the body with an overall thickness of 65 mm. The inner lining is further strengthened with 5 mm thick Drill Resisting Armour plate.

**DOOR :** The overall thickness of the door is 140mm. It is made from hard barrier material and tough steel plates, reinforced with drill and sledge hammer resistant special steel, making the door slab 67 mm thick over the lock and other vital parts. The lock is further protected by drill resistant steel including 6 mm thick very special drill resisting alloy plates over the lock - making a total protection of 73 mm over the lock.



**BOLTWORK :** The lock case is an integral part of the door. It is built from solid flanged steel plates forming a rim on all four sides behind the solid rivets provided in the safe's body. The number of bolts in a safe vary according to the size.



**LOCKING DEVICE :** The bolt throwing mechanism is activated by a lever handle and controlled by an UL approved Combination Lock as well as an additional unpickable 8-lever Dual Control Key Lock made by Steelage. These key locks are



provided with separate stainless steel keys marked No. 1 and 2, each in duplicate. This makes it possible for two persons to remain in joint charge of the safe. If the combination lock is used together with the

key lock, three persons can be in joint charge.




675 TL-30



800 TL-30



1050/S TL-30



1050/L TL-30



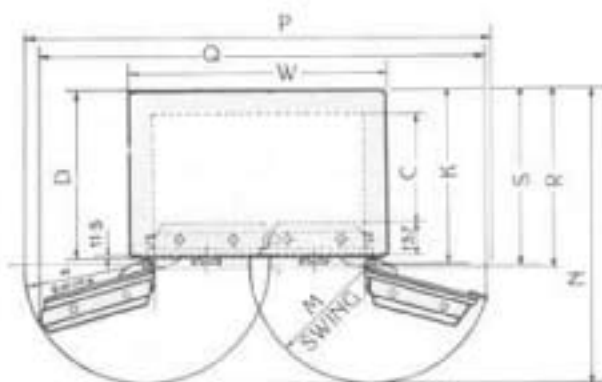
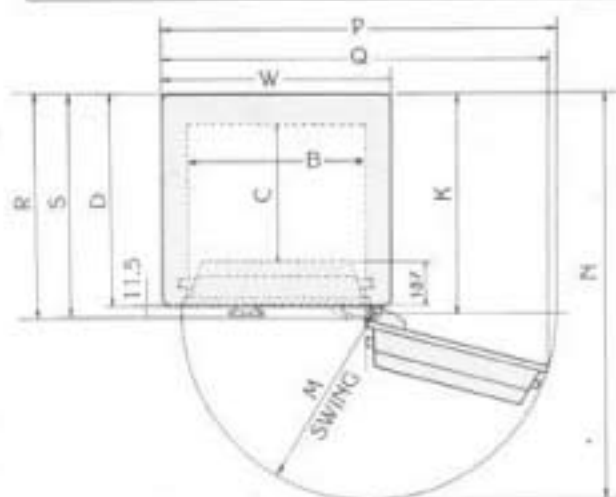
1225 TL-30



1525 TL-30



1525 DD TL-30

**DIMENSIONS & WEIGHTS****Technical Data**

Model	675 TL-30	800 TL-30	1050/S TL-30	1050/L TL-30	1225 TL-30	1525 TL-30	1525 DD TL-30
-------	--------------	--------------	-----------------	-----------------	---------------	---------------	------------------

**OUTSIDE DIMENSIONS (mm/in)**

Height H	675 26 1/2"	800 31 1/2"	1050 41 1/2"	1050 41 1/2"	1225 48 1/2"	1525 60"	1525 60"
Width W	550 21 1/2"	600 23 1/2"	600 23 1/2"	750 29 1/2"	750 29 1/2"	750 29 1/2"	1050 41 1/2"
Depth D	550 21 1/2"	600 23 1/2"	600 23 1/2"	700 27 1/2"	700 27 1/2"	700 27 1/2"	700 27 1/2"
Depth Over Hinge R	585 23"	635 25"	635 25"	735 29"	735 29"	735 29"	735 29"
Depth Over Handle S	576 22 1/4"	626 24"	626 24"	726 28 1/2"	726 28 1/2"	726 28 1/2"	726 28 1/2"

**INSIDE DIMENSIONS (mm/in)**

Height A	475 18 1/2"	600 23 1/2"	850 33 1/2"	850 33 1/2"	1025 40 1/2"	1325 52"	1325 52 1/2"
Width B	350 13 1/2"	400 15 1/2"	400 15 1/2"	550 21 1/2"	550 21 1/2"	550 21 1/2"	8" 3 1/2"
Depth C	300 11 1/2"	350 13 1/2"	350 13 1/2"	450 17 1/2"	450 17 1/2"	450 17 1/2"	450 17 1/2"

**OVERALL SIZES - DOOR OPEN (mm/in)**

N	978 38 1/2"	1078 42 1/4"	1078 42 1/4"	1328 52 1/4"	1328 52 1/4"	1328 52 1/4"	1188 44 1/2"
P	876.5 34 1/2"	976.5 38 1/4"	976.5 38 1/4"	1276.5 50 1/4"	1276.5 50 1/4"	1276.5 50 1/4"	1823 71 1/2"
Q	873.5 34 1/2"	972 38 1/2"	972 38 1/2"	1266.6 49 1/4"	1266.6 49 1/4"	1266.6 49 1/4"	1813 71 1/4"

**FOR SWING (mm/in)**

K	570 22 1/4"	620 24 1/4"	620 24 1/4"	720 28 1/2"	720 28 1/2"	720 28 1/2"	720 28 1/2"
M	408 16 1/4"	458 18"	458 18"	608 23 1/2"	608 23 1/2"	608 23 1/2"	468 18 1/4"

**CAPACITY & WEIGHT**

Approx. Cap. in Litre	50	84	119	210	254	328	507
Cu. Ft.	1.8	3.0	4.2	7.4	9.0	11.6	17.9
Nett. Wt. in Kg.	400	550	730	805	990	1130	1490
in Lbs.	880	1210	1606	1774	2178	2486	3278
Gross Wt. in Kg.	445	610	819	905	1065	1230	1690
in Lbs.	979	1342	1802	1995	2343	2706	3718

**ACCU-SAFES, INC.**

112 Newtown Rd Plainview, NY 11803

(516) 752-3893

Fax: (516) 752-9619