


Major

HOME AND OFFICE Insulated Record Safes 1-Hour Class "350" Label

6 MODELS OF YOUR CHOICE

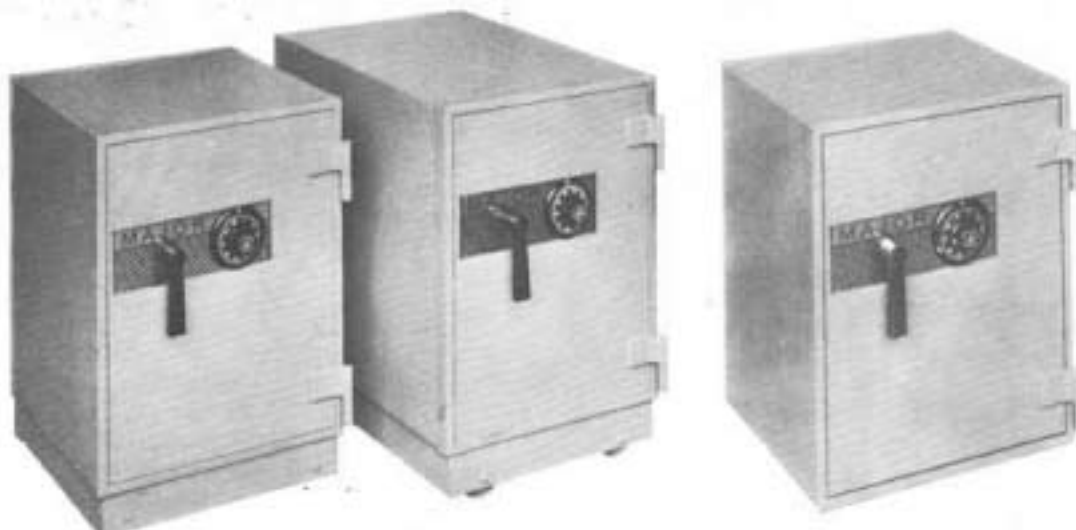

MODEL NO. 1712

BOTH MODELS
HAVE CASTERS

MODEL NO. 1718

MODEL NO. W-1712

WALL SAFE
DOES NOT HAVE
SKIRT OR CASTERS

NOTE: SEE REVERSE SIDE FOR OPTIONAL EQUIPMENT.

COLOR: DESERT SAGE

GENERAL SPECIFICATIONS

These safes are rigidly constructed of all steel plate. Outer and inner shell are electrically welded together to provide extra strength.


BOLT-mechanism is rigidly constructed for maximum protection. LOCK-Sargent Greenleaf Group Two Combination KEY CHANGE LOCK, protected by a drill resistant steel plate.

ALL MAJOR record safes are built in strict conformity with the United States Federal Specifications AA-S-81 for a class "350" Insulated safe. Section E-2c of these specifications states, "CLASS 350" safes shall be able to withstand fire test for one hour without attainment of temperature within the safe at any thermocouple location higher than 350° F. (177° C) either during or after the fire exposure.

Add 1½" to depth for handle and ¾" to width for hinges.

MODEL NUMBER	INSIDE SIZES IN INCHES			OUTSIDE OVERALL IN INCHES			APPROX. SHIP. WTS.	INSIDE CAPACITY CU. IN.
	HIGH	WIDE	DEEP	HIGH	WIDE	DEEP		
1512	15"	12½"	12"	22¼"	16⅞"	16⅞"	170	2250
W-1512	15"	12½"	12"	19⅝"	16⅞"	16⅞"	160	2250
1712	17"	12½"	12"	24¼"	16⅞"	16⅞"	196	2550
W-1712	17"	12½"	12"	21¼"	16⅞"	16⅞"	192	2550
1718	17"	12½"	18½"	24¼"	16⅞"	22¾"	237	4031
W-1718	17"	12½"	18½"	21¼"	16⅞"	22¾"	233	4031

LOOK FOR THESE LABELS — THEY INSURE YOU TOP SECURITY



The Criterion of Quality . . . **MAJOR SAFES** . . . Los Angeles, Calif. 90023